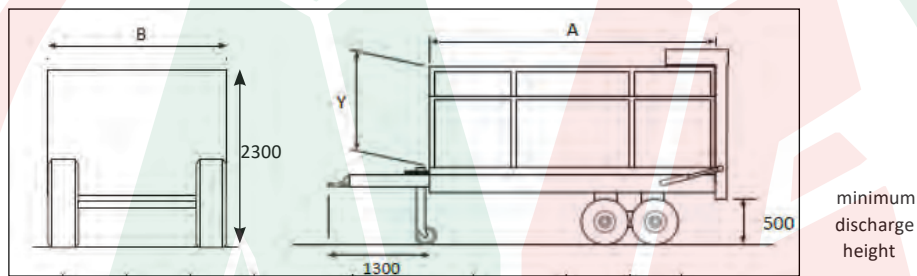




# TRAILER AFRR TA INOX

- Complete with 2.5 mm thick AISI 304 watertight stainless steel tank
- Axle with tandem compensating system
- Steel frame
- Front fluid guard
- Rear hydraulic unloading with tractor oil operation and end stroke valve
- Height-adjustable towing eyelet
- Hydraulic support foot
- Rear tailgate with hydraulic opening and oil tractor operation
- Hydraulic cylinders to stop the compensating tandem system
- Hydraulic cylinder to discharge the container with end-of-stroke and tractor oil operation
- N° 4 hydraulic double acting jacks



| MOD.                   | A<br>mm | B<br>mm | Y<br>mm | Type of<br>Tandem       | used<br>WHEELS                | Braking                   | m <sup>3</sup> | Tare<br>Kg. | € | BRAKING<br>SYSTEM<br>COSTS |
|------------------------|---------|---------|---------|-------------------------|-------------------------------|---------------------------|----------------|-------------|---|----------------------------|
| AF RR TA INOX<br>40x20 | 4000    | 2000    | 1200    | fixed rear<br>wheels    | 355/50 R22.2<br>o 435/50 19.5 | hydraulic or<br>pneumatic | 8.5            | 2200        |   |                            |
| AF RR INOX<br>40x20 S  | 4000    | 2000    | 1200    | steering rear<br>wheels | 355/50 R22.2<br>o 435/50 19.5 | hydraulic or<br>pneumatic | 8.5            | 2900        |   |                            |
| AF RR TA INOX<br>45x20 | 4500    | 2000    | 1200    | steering rear<br>wheels | 355/50 R22.2<br>o 435/50 19.5 | hydraulic or<br>pneumatic | 10             | 3200        |   |                            |
| AF RR TA INOX<br>50x20 | 5000    | 2000    | 1200    | steering rear<br>wheels | 355/50 R22.2<br>o 435/50 19.5 | hydraulic or<br>pneumatic | 12             | 3600        |   |                            |
| AF RR TA INOX<br>50x23 | 5000    | 2300    | 1200    | steering rear<br>wheels | 355/50 R22.2<br>o 435/50 19.5 | hydraulic or<br>pneumatic | 13.5           | 3600        |   |                            |
| AF RR TA INOX<br>55x23 | 5500    | 2300    | 1200    | steering rear<br>wheels | 355/50 R22.2<br>o 435/50 19.5 | hydraulic or<br>pneumatic | 15             | 4500        |   |                            |
| ON DEMAND              |         |         | 1400    |                         |                               |                           |                |             |   |                            |

## COSTS OF BRAKING SYSTEM for 8000-10000-12000-14000 Kg

|                                                                                     |                      |  |
|-------------------------------------------------------------------------------------|----------------------|--|
|  | PNEUMATIC            |  |
|  | HYDRAULIC WITH PEDAL |  |