




## Vertical Mixers

*The top of mixing*

14


ZOOTECCHNY

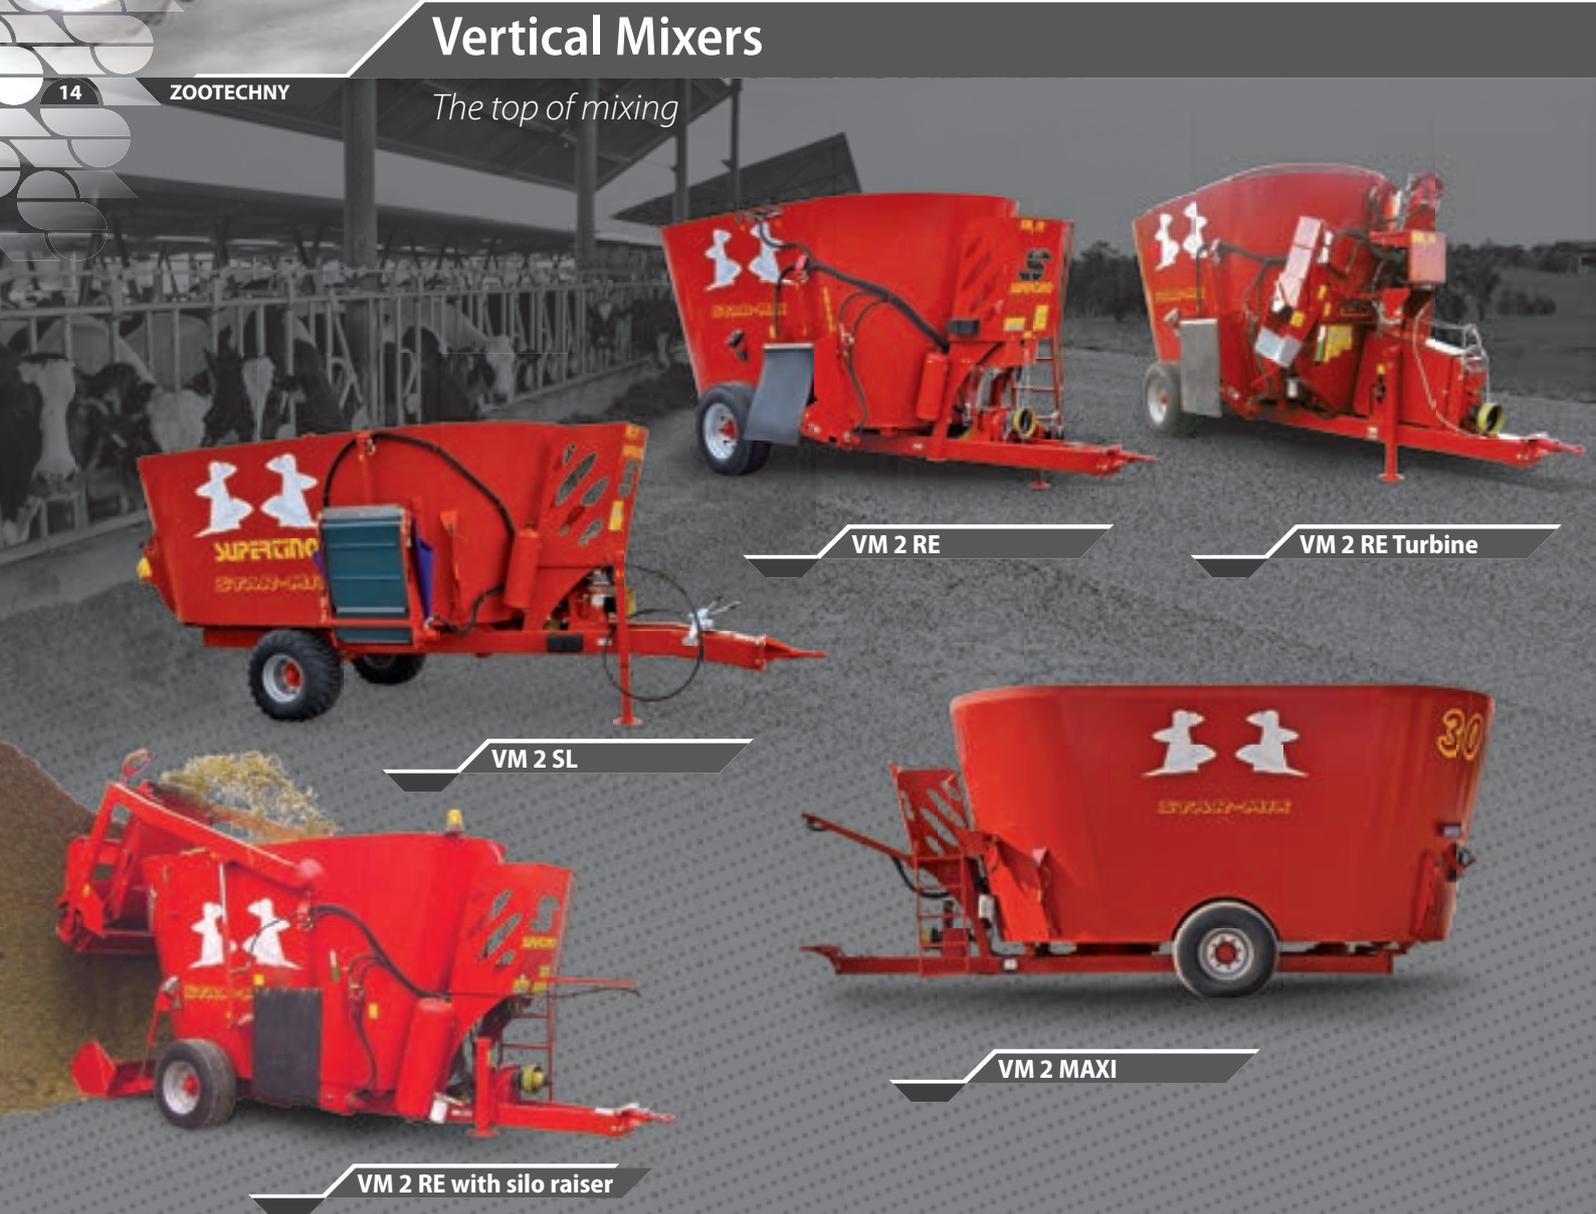

Converging augers.

- Gear-box incorporated in the augers.
- Oil tank for the gear-box of the auger.
- Easy maintenance.

Programmable weighing system  
50 recipes and 30 components.

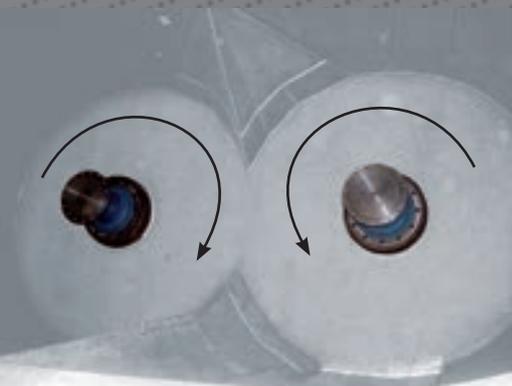



Spreading of straw up to 18 meters.



- The access to the turbine is easy from the cover fixed with 5 nuts.
- Removable blades on the turbine.




The turbine can be fitted on all versions 2 or 3 augers. Possibility to unloading with the turbine. The turbine is standard fitting with 2 speeds gear-box. Cardan shaft for turbine with clutch and free-wheel.



### VM Easy Mix



"Top speed" Knives on the top of the augers.

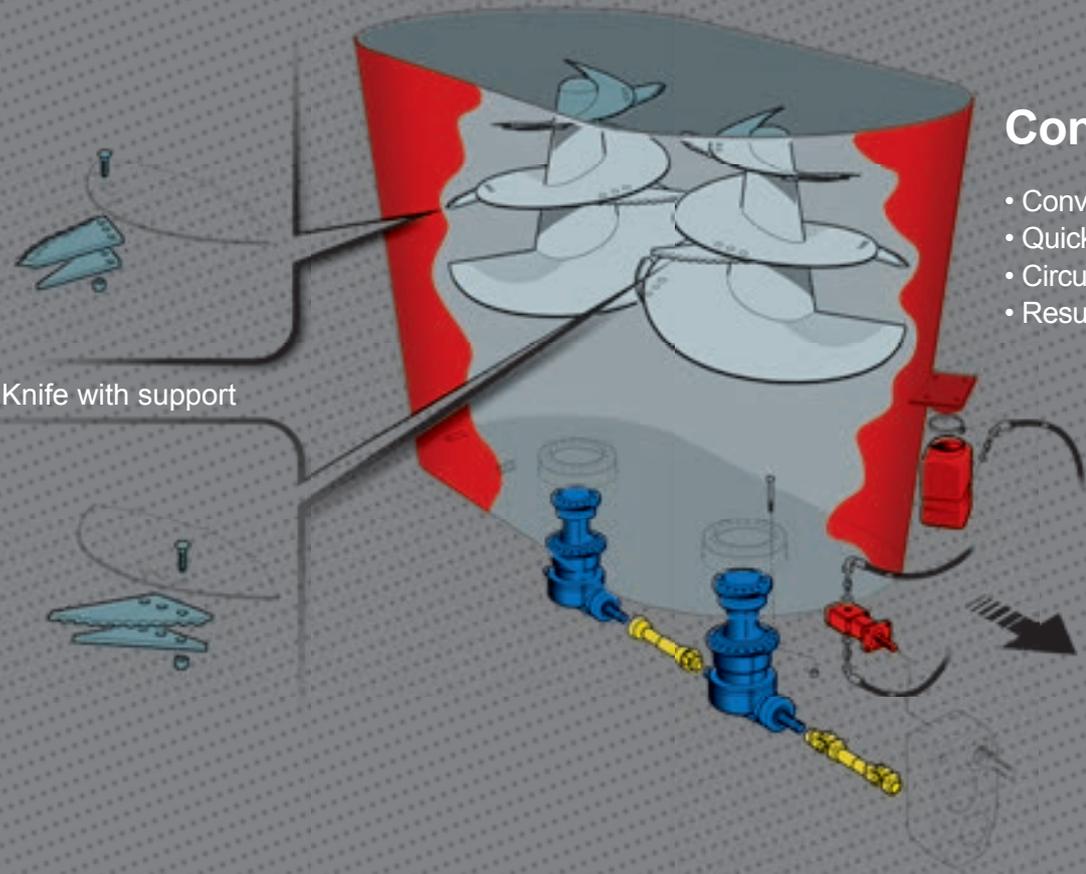

### Converging augers

- Converging augers
- Quickly cutting
- Circulation of the product
- Result: homogeneous mixing




## Vertical Mixers

*The top of mixing*

16

ZOOTECHNY

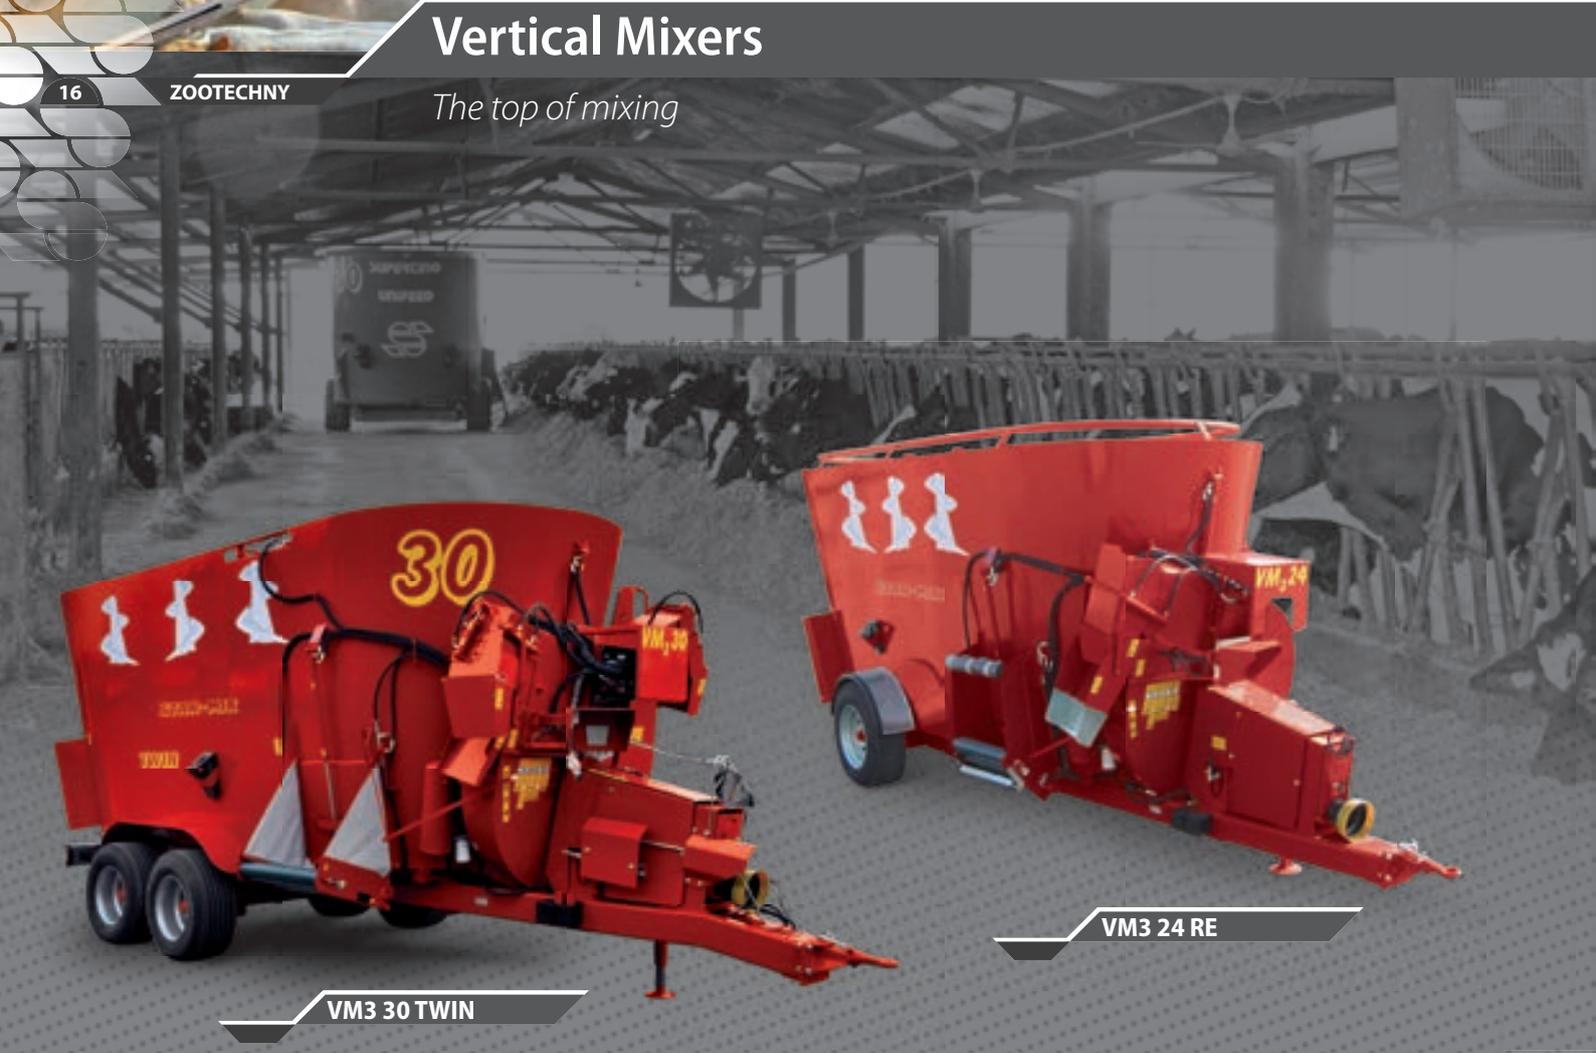

**VM3 30 TWIN**

VM3 30 m<sup>3</sup> Twin  
with right and left front unloading belt.  
Turbine with two unloading  
on the right and on the left.



**VM3 24 RE**

- An extraordinary range for high performances.
- 2 augers cut more fast than 1, but 3 cut even faster.
- Compact both in width and height.
- Available from 15 until 40 m<sup>3</sup>.
- Can be equipped with one single axle or with double axle balance system.
- Turbine is available on all models.

TWIN: double axle balance system with rear steering axle.





VM3-30 m<sup>3</sup> (Height 305 cm + 15 cm containing ring).

VM3 24m<sup>3</sup> Power-mix 145 Hp.  
Frontal left unloading with belt.  
Rear central unloading.  
Turbine.  
Hydraulic divider for fibrous products.



- Remote control unit :
- Star and stop engine
  - Electronic indicator
  - Commands for all the functions (unloading, turbine, speed of augers and turbine)
  - Hooking and unhooking from tractor's cab tanks to hydraulic feet.



Remote control for weighing system.

VM3 24 Power Mix

