



D LIGHT LLC

Registration address: Kovpaka str., 21, Poltava, 36007, Ukraine

Post address: 61202, Ludvik Svoboda avenue, 29, Kharkiv, Ukraine



Tel.: +38 (057) 720 11 57

www.dlight.com.ua • info@dlight.com.ua

ALLIGATOR. TELESCOPIC LOADER ATTACHMENT FOR TREES AND BUSHES PULLING.



The attachment is developed for clearing of landings of trees, wooded fields, clearing of overgrown bushes and shrubs. The equipment allows to uproot shrubs and trees up to 25cm diameter, depending on the tree species and soil type. It's a mechanical device that is installed for such telescopic loaders as MANITOU, JCB, Dieci, BobCat, Merlo, Caterpillar, NewHolland, Claas, Faresin or on tractors of class 2-3, and others. Using special transitional frame Alligator can be combined with other special machines. You can order a special transition frame from the Manufacturer.

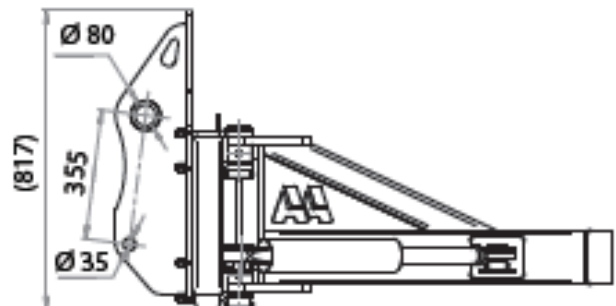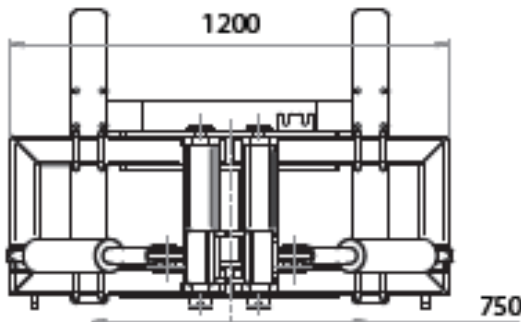

SPECIFICATIONS

The type of device	Hinged
The diameter of the uprooted wood (min / max)	30/250 mm
Overall (length / width / height)	1200/1200/470 mm
The maximum opening of jaws	1200 mm
Weight (dry / operational)	245/255 ± 5 kg



D LIGHT LLC

Registration address: Kovpaka str., 21, Poltava, 36007, Ukraine

Post address: 61202, Ludvik Svoboda avenue, 29, Kharkiv, Ukraine



Tel.: +38 (057) 720 11 57

www.dlight.com.ua • info@dlight.com.ua

CLAW. TELESCOPIC LOADER ATTACHMENT FOR TREES AND BUSHES PULLING.



The 3-in-1 "Claw" uproar with hydraulic gripper has knife, ladle and pincers. This device is used for clearing of forested fields, for clearing of ground areas, obstacles to the passage of your tractor. Ideal for removing trees, seedlings, shrubs, bushes and other obstacles on fields, construction sites or farmyards. Incomparable versatility of the device allows to uproot the most difficult stumps, columns, boulders, fences and land clearing activities.

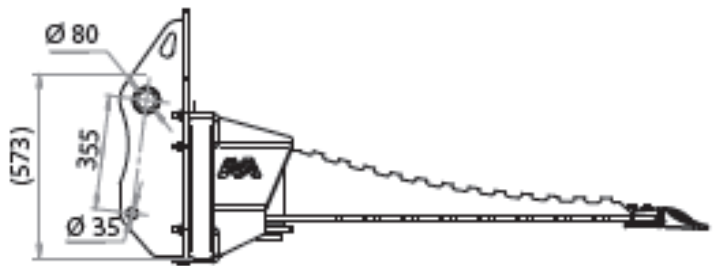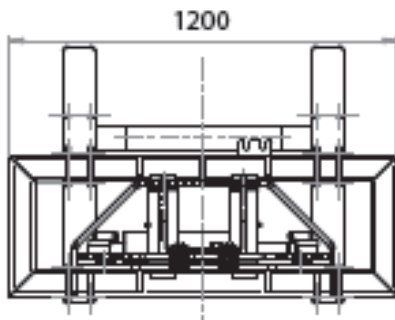

SPECIFICATIONS

The type of device	Hinged
The diameter of the uprooted wood (min / max)	30/250 mm
Overall (length / width / height)	1821 / 1200 / 586 mm
The maximum opening of jaws	1205 mm
Weight (dry / operational)	285 ± 5 kg